

865

Over-pressure shut off safety device

TECHNICAL SPECIFICATIONS:

- Set pressure 1,2 - 4,7 bar
- OPSO for type 160
- Spare part
- PN 25

For further technical specifications on this regulator please see reverse.



80 years of proven experience

Discover more of our products at: www.bmv.dk

TECHNICAL SPECIFICATIONS:

865 Over-pressure shut off safety device

About this over-pressure shut off safety device

At an inadmissible rise of the outlet pressure of the regulator the activation pressure of the safety device (OPSO) will be reached which will then close by itself and block the gas flow.

If the OPSO device needs to be reset then disassemble the brass protection cap and the internal thread has to be screwed on to the threaded pin. The cap can then be pulled back to reset the OPSO device.

DVGW Approved: according to EN 16129 / CE marking according to 2009/142/EC

Connection: To be connected with type 160

Set pressure: 1,2 - 4,7 bar or other on request


Weight: Approx. 1 kg

Gas: LPG / LNG / Propane / Butane / Natural gas or other on request

Working temperatur: -40°C to +50°C

Contact our Sales Department to place your order:

Phone: +45 73 42 12 12 · **info@bmv.dk**

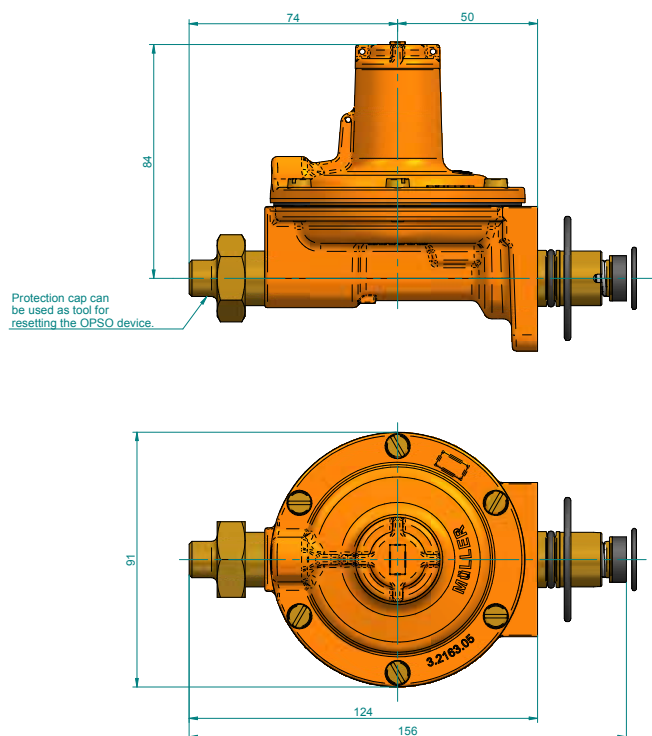

Müller
GAS EQUIPMENT A/S
GAS CONTROL SOLUTIONS

Müller Gas Equipment A/S

Mommarkvej 7-11 · Vollerup · DK-6400 Sønderborg

Telefon: +45 73 42 12 12 · Fax: +45 73 42 12 07 · email: info@bmv.dk · www.bmv.dk

See our online
catalogue

