

744

Pressure relief valve

TECHNICAL SPECIFICATIONS:

- Set pressure 1-5 bar
- Can be combined with nearly every MGE regulator
- Spare part
- PN 25

For further technical specifications on this regulator please see reverse.



80 years of proven experience

Discover more of our products at: www.bmv.dk

TECHNICAL SPECIFICATIONS:

744 Pressure relief valve

About this over-pressure shut off safety device

At an inadmissible rise of the outlet pressure of the regulator the activation pressure of the safety device (PRV) will be reached which will then exhaust the gas flow.

DVGW Approved: according to EN 16129 / CE marking according to 2009/142/EC

Connection: G 1/4

Set pressure: 1-5 bar or other on request


Weight: Approx. 0,5 kg

Gas: LPG / LNG / Propane / Butane / Natural gas or other on request

Working temperatur: -40°C to +50°C

Contact our Sales Department to place your order:

Phone: +45 73 42 12 12 · **info@bmv.dk**

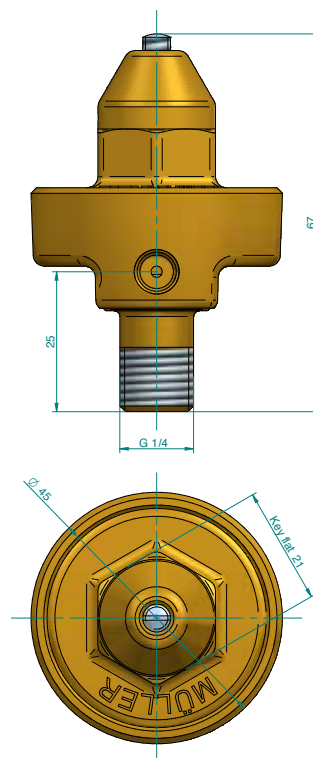

Müller

GAS EQUIPMENT A/S

GAS CONTROL SOLUTIONS

Müller Gas Equipment A/S

Mommarkvej 7-11 · Vollerup · DK-6400 Sønderborg

Telefon: +45 73 42 12 12 · Fax: +45 73 42 12 07 · email: info@bmv.dk · www.bmv.dk

See our online
catalogue

